

Bliss 50 on a 65cm Reservoir Installation Instructions.

Please read all instructions before commencing installation

Warning Heavy Stone Take Care when Lifting if unsure consult a specialist.

Dig the hole in preparation for the reservoir installation. Approximately 45 cm deep from the top of ground level down. See Diagram A.

The concrete footing base must be level and should be a minimum of 12cm deep. Allow the concrete footing base to dry for **24 hours**. A thin layer of sand on the concrete footing will protect the reservoir from puncturing.

Set up the reservoir so that the top of the reservoir is a little lower than required surrounding ground or paving. A little extra sand can help bring up the level if need be. See Diagram B.

Fill the reservoir with water before backfilling around the outside with concrete. This will prevent the reservoir from moving before the concrete dries. See diagram C.

Backfill around the reservoir.

Insert pump into reservoir, and feed power cable up and through to the required power supply (**see note**).


Place covers on reservoir, then place metal support plate on top.

Place the delivery pallet close to the installed reservoir remove 5 sides of the Bliss box with a screw driver, leaving 1 side between the Bliss the pallet use one side of the box as a ramp to carefully roll the Bliss down from the pallet into position on the reservoir. (2 men are required).

Move Bliss onto metal support. Feed water pipe down through the hole in bliss base (a small amount of foam packaging can be packed down the hole and around the pipe to prevent some water flow back) and connect to pump via the access hatch.

Pebbles can be placed inside the Bliss to displace water. Finally dress the reservoir with pebbles.

The pump can be adjusted to the required flow rate of water.

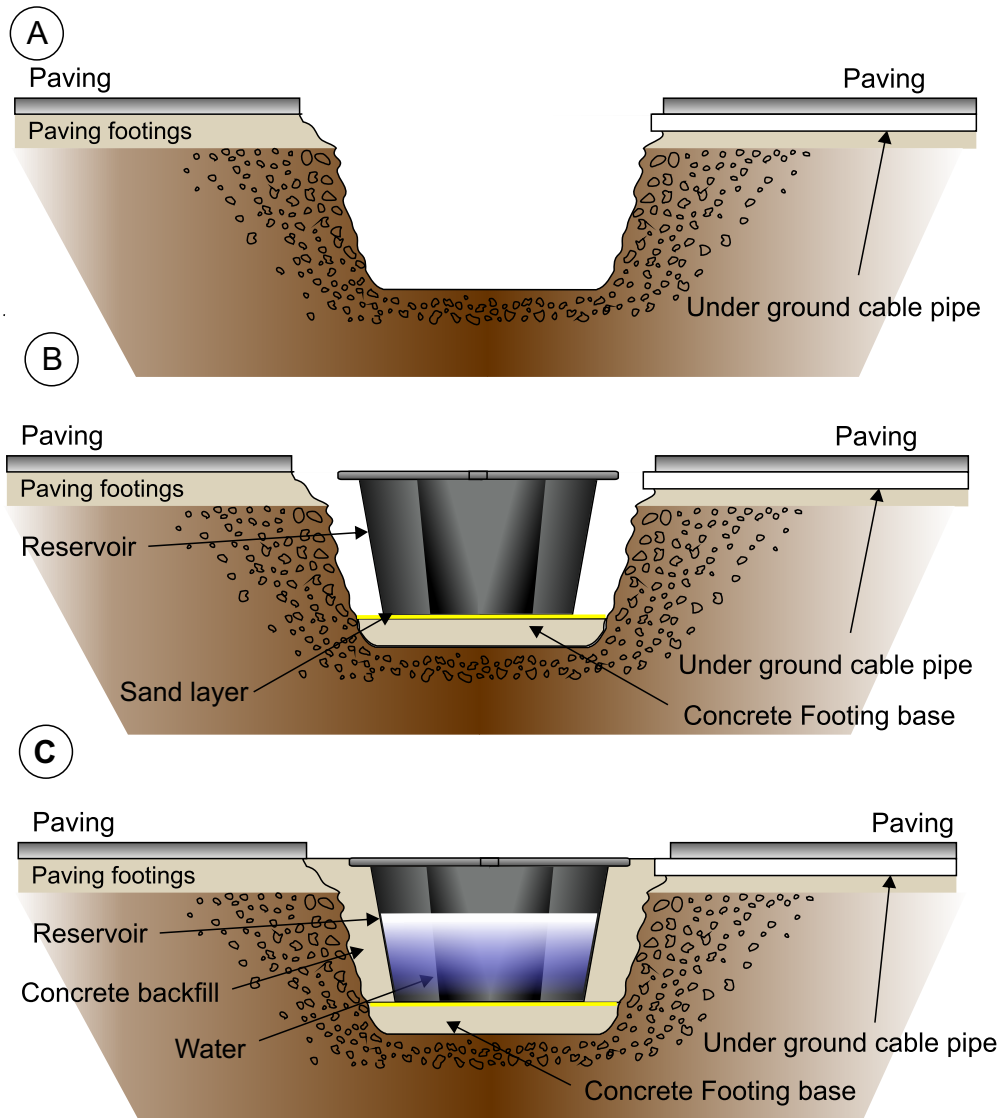

Important Notes:-

Allow the concrete footing base to dry for **24 hours**.

Wet concrete mix must be used when back filling to ensure the concrete fills up and under the reservoir fins, these fins when full of concrete carry the full weight of the stone feature.

We recommend running the pump cable through an under ground pipe from the feature to the power supply.

WARNING NOTE. Bliss balls are **heavy**. Take extra care when moving them.

